


# STORM

EXON

## A. Features

- 12 digits LCD display
- Dual time / Alarm / Chime
- Normal display : Hours (12/24), minutes, seconds, month, date and weekday
- Auto calendar : 2000 -2099
- 1/100 second chronograph with working range of 0 to 99:59:59.99
- 5 split-chronograph recalls
- Thermometer functions ('C or 'F selectable)
- Digital compass
- Count-down timer with working range of 0 to 59:59:59
- EL back light with 3 seconds delay



### Features

- Beep will sound for 30 seconds at preset Alarm.
- Press any key to stop the alarm.

### FOR T2 ALARM/CHIME


- Press S2 to trigger T2 Alarm/Chime Mode.
- Press S1 to activate Alarm/Chime On/Off.
- Press and hold S2 for 2 seconds to enter Setting Mode and follow the same setting procedures as Home Alarm Setting.

## B. Operational Manual

### 1. NORMAL TIME

#### Setting Procedures

- Press and hold S2 for 2 seconds to enter the setting mode.
- Press S1 to reset Second digits to "00".
- Press S3 to jump from each of the setting items.
- Press S1 to set a new time or hold S1 for rapid advance.
- Press S2 to exit and confirm the current setting.
- The setting sequence is shown as follows:

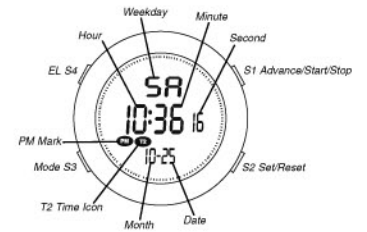

### FOR T2 TIME (DUAL TIME)

- Press S1 to trigger T2 Time Mode
- Press and hold S2 for 2 seconds until Hour flashes and follow the same setting procedures as Normal Time Setting.


### Note

On T2 the second digits cannot be re-set.

## 2. ALARM/CHIME

### Setting Procedures


- Press S3 to select Alarm/Chime Mode (AL).
- Press S1 to activate Alarm/Chime On/Off.
- Press and hold S2 for 2 seconds to enter Setting Mode.
- Press S3 to toggle Hour or Minute.
- Press S1 to preset the Alarm or hold S1 for rapid advance.
- Press S2 to confirm and exit the setting mode.

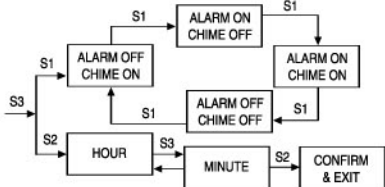

## 3. THERMOMETER

### Instructions

- Press S3 to enter the Thermometer Mode (TP).
- The thermometer shows the previous temperature reading.
- Press S1 to measure the existing reading.
- Beep will sound when measured.
- Press S2 to convert the alternative unit.

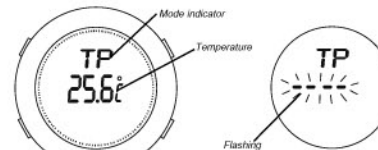


### Note

- The screen will flash "----" mark if the temperature range is outside 0°C - 50°C.
- Readings are only an approximate indication.

## 4. DIGITAL COMPASS

### Instructions

- Press S3 to enter the Digital Compass Mode.
- Press and hold S2 for 2 seconds to calibrate the compass sensor.
- Press S1 to scan the digital compass reading for 10 seconds.

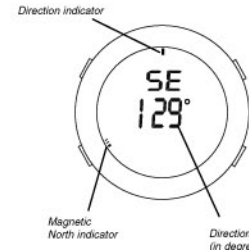

**Note** readings are only an approximate indication.