


## DISPLAY DETAILS

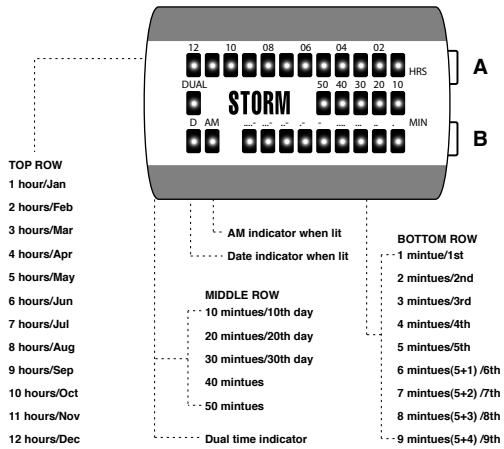

## FUNCTIONS AND FEATURES

- DUAL TIME
- DATE
- LED LUMINOUE DISPLAY
- DIY BATTERY CHANGE

### READING THE TIME

Press button A once to display the time.

### READING THE DATE

Press button A twice to display the date.

### READING THE DUAL TIME

Press button A thrice to display the dual time.

## SETTING THE TIME, DATE AND DUAL TIME

Press Button A once to display the time.  
 Press button B once to enter setting mode.  
 Press button A repeatedly to advance HOUR  
 Press button B to confirm  
 The AM indicator will light at 12 AM  
 Press button A repeatedly to advance Minute  
 Press button B to confirm  
 Date indicator lights to show DATE mode  
 Press button A repeatedly to advance MONTH  
 Press button B to confirm  
 Press button A repeatedly to advance DATE  
 Press button B to confirm  
 Dual time indicator lights to show DUAL TIME mode.  
 Press button A repeatedly to advance HOUR  
 Press button B to confirm and EXIT  
 NB Dual time minutes are synchronised with normal time.



VIBE

## READING THE TIME

The top line shows the HOUR by counting the number of lights from right to left.  
 1 light = 1 Hour  
 The example shows: 08 am

The middle line shows a tally of 10 MINUTES by counting the lights from right to left.  
 1 light = 10 Mins  
 The example shows: 30 min

The bottom line shows the MINUTES from 1-9 by counting the number of lights from right to left.  
 1 light = 1 Min  
 The example shows: 3 min

THE TIME IS : 08:33 am

## READING THE DATE

The top line shows the MONTH by counting the number of lights from right to left.  
 1 light =1 Month  
 1=Jan 2=Feb 3=Mar... 12=Dec  
 The example shows: JUNE


The middle line shows a tally of 10 DAYS by counting the lights from right to left.  
 1 light =10 Days  
 1=10th 2=20th 3=30th  
 The example shows: 20th

The bottom line shows the DAYS from 1st-9th by counting the number of lights from right to left.  
 1 light = 1 Day  
 1=1st 2=2nd 3=3rd... 9=9th  
 The example shows: 6th

## EXAMPLES


### TIME EXAMPLE

THE TIME IS:  
 08:33 am

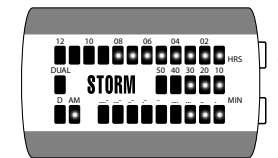


### DATE EXAMPLE

THE DATE IS:  
 JUNE 26th

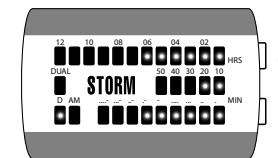

### DUAL TIME EXAMPLE

THE TIME IS:  
 10:59 pm

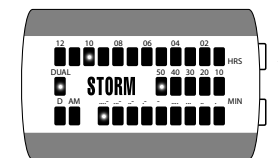

## READING THE DUAL TIME

The DUAL TIME indicator will be lit to show dual time mode.

The top line shows the HOUR by lighting up only the correct digit.  
 The example shows: 10 pm

The middle line shows a tally of 10 MINUTES by lighting up only the correct digit.  
 The example shows: 50 min

The bottom line shows the MINUTES from 1-9 by lighting up only the correct digit.  
 The example shows: 09 min

NB. This watch features an easy open case back for DIY battery changing. Use a coin placed in the slot on the case back to turn in the direction indicated to either Open/Close. Please make sure case back is closed securely. Battery type: CR2032 (3V)