




RADIOTRON

DISPLAY

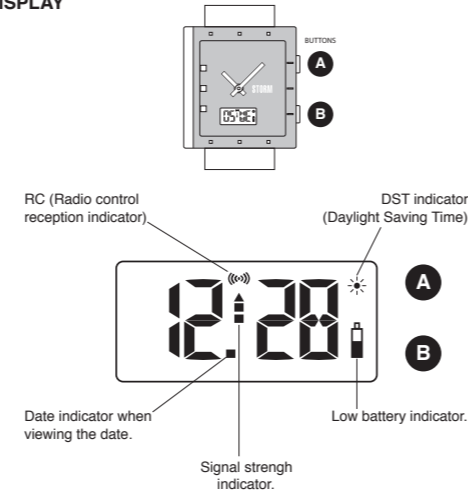


CHECKING FOR THE RADIO CONTROL SIGNAL

Press and hold button A until the RC (Radio Control) icon appears (☺) on the LCD display. If there is a signal available, the signal strength indicator will appear underneath. Press and hold button A until the RC (Radio Control) icon disappears.

MODE SEQUENCE

PRESS BUTTON A TO SCROLE THROUGH THE SEQUENCE AS SHOWN BELOW.

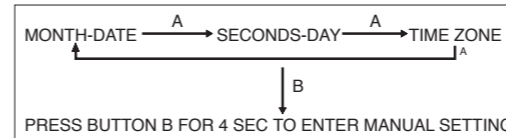

MANUAL SETTING

PRESS BUTTON B FOR 4 SEC FROM MODE SEQUENCE ABOVE TO ENTER INTO MANUAL SETTING. PRESS BUTTON B TO SCROLE THROUGH THE SEQUENCE AND BUTTON A TO ADJUST AS SHOWN IN **MANUAL SETTING SEQUENCE. fig 1**

FEATURES

RADIO CONTROLLED SIGNAL RECEPTION, DATE, DAY, TIME ZONE, LOW BATTERY INDICATOR.



MY07


TIME ZONES

Time zone	Watch code	DST status
-12	-12H	OFF
-11	-11H	OFF
-10	-10H	OFF
-9	-09H	AUTO
-8	US-P	AUTO
-7	US-M	AUTO
-6	US-C	AUTO
-5	US-E	AUTO
-4	-04H	OFF
-3	-03H	OFF
-2	-02H	OFF
-1	-01H	OFF
GMT	UK	AUTO
+1	EU	AUTO
+2	2H	AUTO
+3	3H	OFF
+4	4H	OFF
+5	5H	OFF
+6	6H	OFF
+7	7H	OFF
+8	CN	OFF
+9	JP	OFF
+10	10H	OFF
+11	11H	OFF
+12	12H	OFF

LOW BATTERY INDICATOR

The low battery indicator only appears when the battery is nearly out of power and will need changing as soon as possible.

RADIO CONTROL SETTING SEQUENCE fig 2

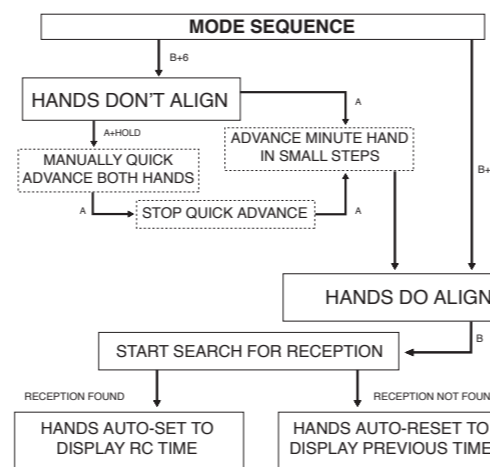

RADIO CONTROL (RC) SETTING SEQUENCE Fig: 2

Press and hold button B for 6 seconds. The hands should quick advance and line up to the 12 o'clock position, the digital display will flash '00:00'.

NB If the hands do not align at the 12 o'clock position, press and hold button A to start quick advance of both hands. Just before both the hands reach the 12 o'clock position press button A to stop quick advance. Press button A to manually advance the minute hand 20 secs with each press until both hands are aligned at twelve o'clock.

When the hands are aligned correctly, press button B to start the Radio Control search. If signal is received, (1-5 mins) time will be set automatically. For best results the radio signal should be full reception ie 3 bars on the LCD indicator. If no signal is detected, press B to return to previous time displayed.

MANUALLY TURNING THE DST ON / OFF / AUTO

Press and hold button B until LCD flashes.(4 secs) Press B again for DST. Press A to scrole through ON / OFF / AUTO. Press B to confirm.

MANUAL SETTING SEQUENCE. fig 1

